


Front Dana 60 Pinion Yoke options:

Refer to following diagrams when reading chart.

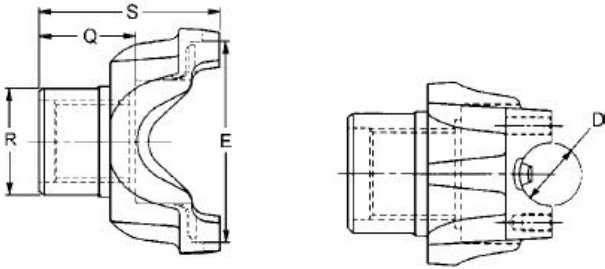

BS/ CV/ HR/ UB Style

NOTE: D is the Ujoint cap diameter

E is the outside dimension across the joint from cap to cap

R is the diameter of the machined seal surface

Q is the length though the hole, and while not absolutely critical should be close o as to allow proper pinion nut tightening

S is the total "length" of the yoke, and as such, assuming Q is close, will affect driveshaft length slightly

Bold text in the table indicates factory application, according to Drive Train Specialists. Note the differences in max allowable joint angles - may be important / helpful in some applications.

Ujoint series	Joint width E	Cap dia. D	U-bolt kit	Strap kit	Major Diameter	Ground Hub diameter (R)	Length through hole (Q)	Centerline to end (S)	Joint Angle	BearingStrap(BS) or U-bolt (UB)	Yoke plus slinger part #	Slingerpart #	Yoke Part #
1310	3.219	1.062	2-94-28X		1.2760	1.8750	1.5000	2.5310	18.0	UB	2-4-3781X	30798	2-4-3771
				2-70-18X	1.2760	1.8750	1.5000	2.9380	18.0	BS	2-4-3801-1X	34592	2-4-3791-1
			2-94-28X		1.2760	1.8750	1.5000	2.9380	18.0	UB	2-4-3801X	34592	2-4-3791
				2-70-18X	1.2760	1.8750	1.5000	2.9380	22.0	BS	2-4-6551-1X	34592	2-4-6541-1
				2-70-18X	1.2760	1.8750	1.5000	2.9964		BS	2-4-8391-1X	34592	2-4-8331-1
1330	3.625	1.062	2-94-28X		1.2760	1.8750	1.5000	2.9380	20.0	UB	2-4-3671X	230421	2-4-3661
			2-94-28X		1.2760	1.8750	1.5000	2.9690		UB	2-4-4291X	34592	2-4-4031
				2-70-18X	1.2760	1.8750	1.7000	3.1880		BS			2-4-8421-1
1330-F	3.625	1.125	2-94-58X		1.2760	1.8750	1.5000	2.9380	18.5	UB	2-4-8051X	41195	2-4-8041
			2-94-58X		1.2760	1.8750	1.5000	2.9380	20.0	UB	2-4-5311X	34592	2-4-5301
1350	3.625	1.188		3-70-28X	1.2760	1.8750	1.5000	3.0000	22.5	BS			3-4-12211-1
					1.2760	1.8750	1.5000	3.0000	22.5	BS	3-4-5731-1X	34592	3-4-5721-1
					1.2760	1.8750	1.5000	3.0000	22.5	BS	3-4-13031-1X	45799	3-4-12771-1
					1.2760	1.8750	1.5000	3.0000	22.5	BS	3-4-13031-2X	45799	3-4-12771-2
1410	4.188	1.188		3-70-28X	1.2760	1.8740	1.4200	3.1850	22.5	BS	3-4-11891-1X	34592	3-4-11851-1
				3-70-28X	1.2760	1.8750	1.5000	3.1880	22.5	BS	3-4-5711-1X	34592	3-4-5701-1
			3-94-18X,		1.2760	1.8750	1.5000	3.1880	30.0	UB			3-4-8731
1480	4.188	1.375		3-70-38X	1.2760	1.8750	1.5000	3.5000	22.5	BS	3-4-13391-1X	34592	3-4-9531-1
7290		1.125			1.2760	1.8750	1.5000	3.3590	30.0	BS	2-4-7681-1X	34592	2-4-7671-1

Pic shows 1310 v.s. 1350 yoke

